CS 331, Fall 2026

Lecture 19 (11/2)

Today:
- FindPivot
- Linearity of expectation
- Union bound
- Contention resolution

FindPivot (Part VII, Section 1)

So far: deterministic algos only

This unit: explore power of <u>randomness</u>

One extra power:

```
def Algo():
  • Step 1
  • Step 2
  • Flip coin
  • Step 3
```




On HW: arbitrary bias is also OK

Reminder: both QuickSort and Selection use... FindPivot(L)

Input: L is n real numbers

Output: $e \in L$ s.t. $\text{rank}(e) \in \left[\frac{n}{4}, \frac{3n}{4}\right]$

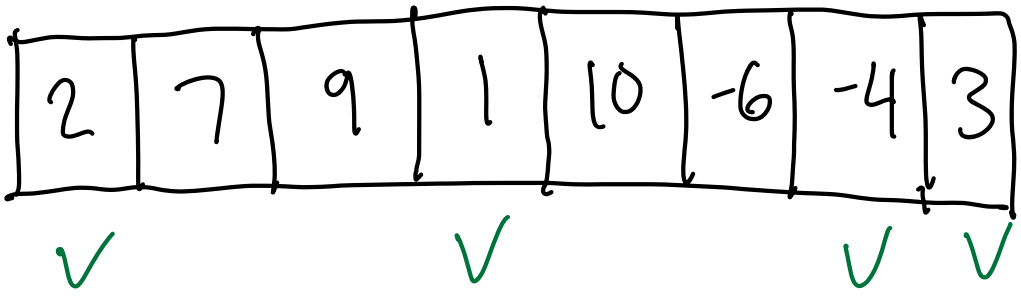

Why? Recurse on two halves, both sides $< \frac{3}{4}n$ entries

Our solution in Part II:

FindPivot → Selection → Median of Medians → ...

... very complicated ...

How can  help?

Idea: Let e = random element of L

Say e is middling if $\text{rank}(x) \in \left(\frac{n}{4}, \frac{3n}{4}\right)$

$$\Pr[e \text{ is middling}] = \frac{\frac{3n}{4} - \frac{n}{4}}{n} = \frac{1}{2}$$

we can check in $O(n)$ time: compute $\text{rank}(x)$

FindPivot(L), take 2:

$e \leftarrow$ uniform random ele of L

While e is not middling: } $O(n)$ time

$e \leftarrow$ uniform random ele of L

Return e

$$\mathbb{E}[\text{runtime}] = O(n) \cdot \mathbb{E}(\underbrace{\#\text{ loops}}_{:= X})$$

(expectation, "average")

What is distribution of X?

$$\Pr[X = i] = \left(\frac{1}{2}\right)^{i-1} \cdot \frac{1}{2} = \left(\frac{1}{2}\right)^{i}$$

$$\mathbb{E}[X] = \sum_{i \geq 1} \Pr[X = i] \cdot i$$

$$= \frac{1}{2} + \frac{2}{4} + \frac{3}{8} + \frac{4}{16} + \dots$$

$$= \left(\frac{1}{2} + \frac{1}{4} + \frac{1}{8} + \frac{1}{16} + \dots\right)$$

$$+ \left(\frac{1}{4} + \frac{1}{8} + \frac{1}{16} + \frac{1}{32} + \dots\right)$$

$$+ \left(\frac{1}{8} + \frac{1}{16} + \frac{1}{32} + \frac{1}{64} + \dots\right)$$

$$= 1 + \frac{1}{2} + \frac{1}{4} + \frac{1}{8} + \cdots = 2$$

$\mathbb{E}$(runtime): $O(n)$!!! so simple ☺

Good "tail behavior": w.p. $> 99.9\%$, $X \leq 10$

Recurring theme: randomized algos are

- simple & intuitive
- sometimes <u>much faster</u> than deterministic
- tricky to analyze... we care about
  1) expected behavior 2) "high prob." behavior

Key issue: no <u>independence</u>!

X independent of Y

if $X|Y$ same as X

(review: Part 1, Sec. 6)



Linearity of Expectation (Part VII, Section 2.1)

Let X, Y be r.v.s in $\mathbb{R}$

$$\mathbb{E}[X+Y] = \mathbb{E}[X] + \mathbb{E}[Y]$$

e.g. algo step 1 e.g. algo step 2

There are no caveats. This is always true!

Extends fine to sums of ≥ 2 r.v.s (recurse)

Intuition:

	H	T	
H	1/4	1/2	$X=1$
T	1/4	0	$X=0$
	$Y=1$	$Y=0$	

$$\mathbb{E}[X+Y] =$$

$$\frac{1}{4}(1+1) + \frac{1}{4}(0+1)$$

$$+ \frac{1}{2}(1+0) + 0(0+0)$$

Group like terms together...

Example


Permutation fixed points

← n students

Everyone in class gives backpack to doorman

Doorman remembers you, but shift changes...

New doorman returns random permutation

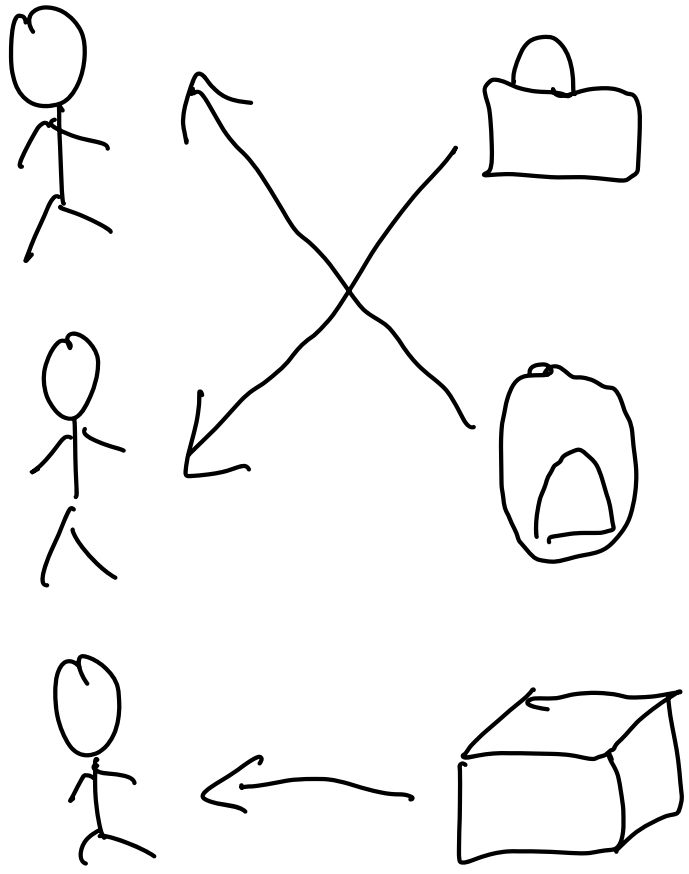

Let $X =$

correct assignments

What is $E[X]$?

$X = X_1 + X_2 + \dots + X_n$

X_i:

0 if student i wrong

1 if student i right

Observation: $\mathbb{E}[X_i] = \frac{1}{n}$

We're immediately done by lin. ex.:

$$\mathbb{E}[X] = \sum_{i \in [n]} \mathbb{E}[X_i] = n \cdot \frac{1}{n} = 1 \quad \blacksquare$$

X_i and X_j <u>not independent</u> but that's OK!

Indicators & Events

Let $\mathcal{E}$ be <u>event</u> (random, either occurs or not)

We define

$$\mathbb{1}(\mathcal{E}) = \begin{cases} 1 & \mathcal{E} \text{ occurs} \\ 0 & \mathcal{E} \text{ doesn't occur} \end{cases}$$

indicator random variable

ex. $X_i = \mathbb{1}(\text{student } i \text{ gets backpack})$

We have

$$\mathbb{E}[\mathbb{1}(\mathcal{E})] = 1 \cdot \Pr[\mathcal{E}] + 0 \cdot (1 - \Pr[\mathcal{E}])$$

$$= \Pr[\mathcal{E}] \quad \text{(also always true)}$$

Example Coupon collector

Every week you get uniformly random coupon

If you collect all n, you win prize!

How many weeks in $\mathbb{E}$?

Let $X = X_1 + X_2 + \dots + X_n$

X: total weeks waited

X_i = # weeks after $(i-1)^{th}$ coupon before i^{th} coupon received

Aside Geometric r.v.s

Let Z = # tosses of coin before first H

H w.p. p

T w.p. $1-p$

e.g. X_i above has $p = \frac{n-(i-1)}{n}$ (new coupons / total coupons)

$$\Pr[Z = i] = (1-p)^{i-1} p$$

$$\mathbb{E}[Z] = \sum_{i \geq 1} i \cdot (1-p)^{i-1} p$$

$$= 1 + (1-p) + (1-p)^2 + \dots = \frac{1}{p}$$

$$\Rightarrow \mathbb{E}[X_i] = \frac{n}{n-(i-1)} \quad \forall\, i \in [n]$$

At this point: linearity gives

$$E[X] = \sum_{i \in [n]} E[X_i]$$

$E[X]$: total weeks

$$= \frac{n}{n} + \frac{n}{n-1} + \dots + \frac{n}{1}$$


$$= n\left(1 + \frac{1}{2} + \dots + \frac{1}{n}\right)$$

$$= O(n \log(n))$$

"Harmonic number"

$$1 + \frac{1}{2} + \dots + \frac{1}{n} \leq 1 + \int_1^n \frac{1}{t}\,dt \leq \log(n) + 1$$

$$\int_{i-1}^{i} \frac{1}{t}\,dt \geq \frac{1}{i}$$

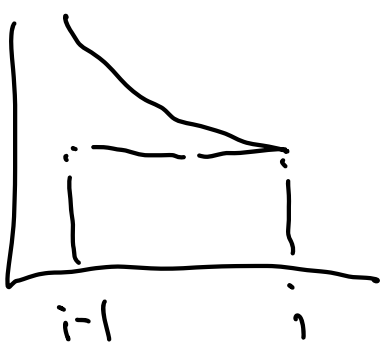

Union Bound (Part VII, Section 2.1)

2nd most useful tool for dependent r.v.s


Let $\mathcal{E}_1, \ldots \mathcal{E}_k$ be <u>any</u> events

$$\Pr\left[\bigcup_{i \in [k]} \mathcal{E}_i\right] \leq \sum_{i \in [k]} \Pr[\mathcal{E}_i]$$

"any event happens"

"event i happens"

Proof 1: picture

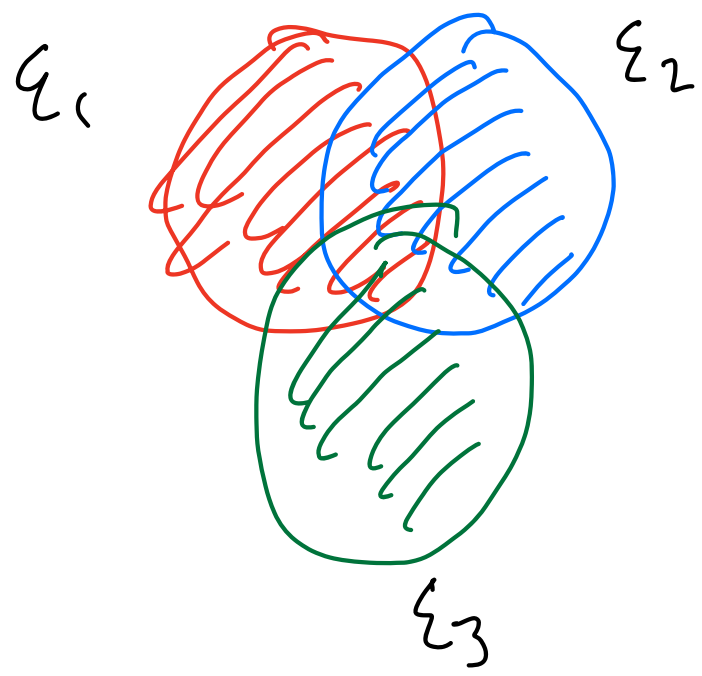

total area

$\leq$ area($\mathcal{E}_1$)

+ area($\mathcal{E}_2$)

+ area($\mathcal{E}_3$)

Proof 2: lin. ex.

Recall $\Pr[\mathcal{E}_i] = \mathbb{E}[\mathbb{1}(\mathcal{E}_i)]$

$$\mathbb{1}\left(\bigcup_{i \in [k]} \mathcal{E}_i\right) \leq \mathbb{1}(\mathcal{E}_1) + \dots + \mathbb{1}(\mathcal{E}_k)$$


Take $\mathbb{E}$ of both sides.

Example Birthday paradox

n students, m days of year

Q: if every student has uniformly random birthday, at what n do we expect collisions (shared bday)?

Real-life app: hashing

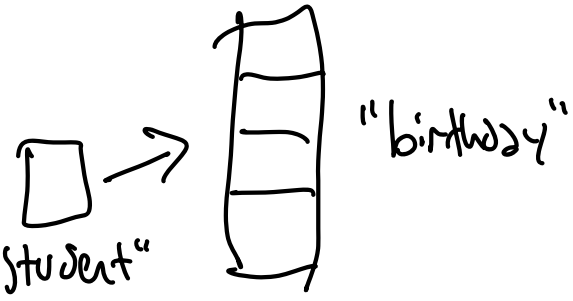

For every pair of students $1 \le i < j \le n$

$$\mathcal{E}_{i,j} = \text{students } i,j \text{ same bday}$$

$$\Pr\left[\begin{array}{c}\text{some two}\\ \text{students collide}\end{array}\right] = \Pr\left[\bigcup_{1 \le i < j \le n} \mathcal{E}_{i,j}\right]$$

$$\le \sum_{1 \le i < j \le n} \Pr[\mathcal{E}_{i,j}] \approx \frac{n^2}{2m}$$

Small if $n^2 \ll 2m$:

e.g. $\sqrt{2 \cdot 365} \approx 27$ students (surprisingly low: "paradox")

Collision probability

Fairly precise: $n > 3.1\sqrt{m}$ $>90\%$

$n < 0.4\sqrt{m}$ $<10\%$

Contention resolution (Part VII, Section 2.2)

n processes want to run jobs (1 unit of time)


need to access shared central server

No communication! each time step:

- make an attempt

or

- make no attempt

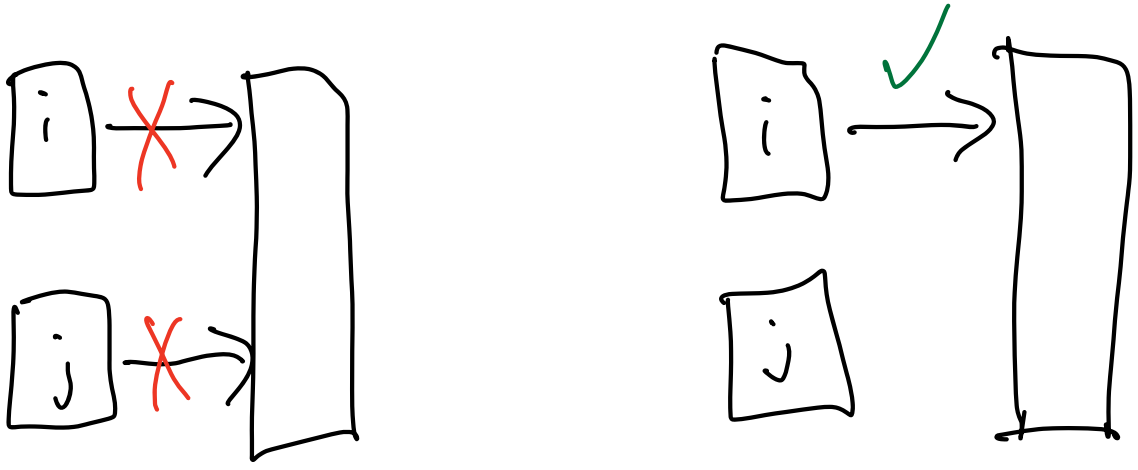

If you are unique attempt, you get served.

$\geq n$ steps necessary. Achievable?

Next: with randomness, $O(n \log(n))$ steps!

Idea: randomly attempt w.p. $\frac{1}{n}$ for T steps

$\mathcal{E}_i$: i^{th} process never uniquely served

In one step,

$$\Pr(i \text{ served}) = \frac{1}{n}\underbrace{\left(1-\frac{1}{n}\right)^{n-1}}_{\approx \frac{1}{e}} \geq \frac{1}{4n} \quad \forall n \geq 2$$

Hence $\Pr[\mathcal{E}_i] \leq \left(1-\frac{1}{4n}\right)^T$

If $T = 4Cn\log(n)$

$$\Pr\left[\bigcup_{i\in[n]} \mathcal{E}_i\right] \leq n \cdot \left(1-\frac{1}{4n}\right)^{4Cn\log(n)}$$

some process not done

$$\leq n \cdot \left(\frac{1}{e}\right)^{C\log(n)} \leq \frac{1}{n^{C-1}}$$

very low!